



Quick Release Mounts for Sim Rigs

QR4rigs®


Change your rig in seconds, spend more time in the game!

The QRPro System is designed for rapid mount/dismount of controllers to/from your rig

Before Fitting your QRPro Base Mount BSB Edition to your rig...


Noteworthy points:

- The QRPro Base Mount and Base Support Bracket (BSB) are 125mm²
- All QR4rigs Base Mounts come fully assembled as they are checked by Quality Control to ensure they perform as expected with the QR Controller plates you order.
- To access the mounting holes, you will need to remove the outer dovetail guides.
- If you remove the dovetail guides at any point, you may have to tweak the tightness of the screws later to get a satisfactory fit.
- You should use at least 2 fixing points for the M6 and M8 fixings and 4 mounting points for the M4 60mm² option to mount the BSB to your rig.
- The T-Nuts provided in the 30 and 40-series Profile M6 Fixing Kits are 'drop-in' type, meaning they can be dropped into a slot without removal of end plates.
 - o Simply add the nuts on to the screws after inserting the screws through the holes in the BSB, line up with the slot in the profile
 - o start tightening the screw slowly should rotate the T-Nut into position at 90 degrees to the slot.
 - o Tighten well once engaged/rotated
- The T-Nuts provided for the M8 Fixing kit are roll in type and can be rolled in to a slot without removal of end plates.
- QRPro Base Mounts are designed to have the QR Plate engaged from the rear of the rig to the front of the rig.

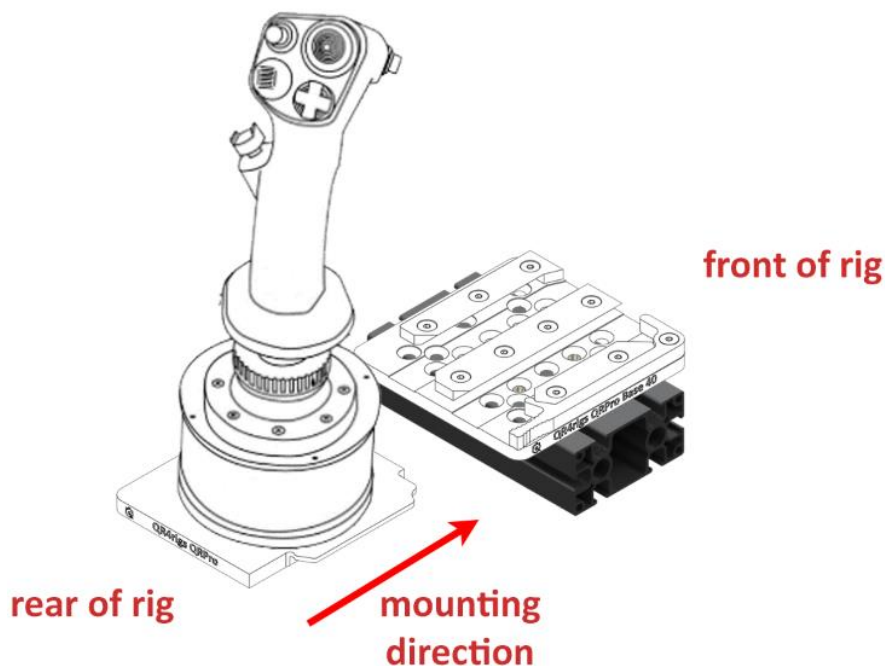

Fitting your QRPro Base Mount using the Base Support Bracket (BSB)

- Fit your BSB to your rig using the fixing kit you have chosen

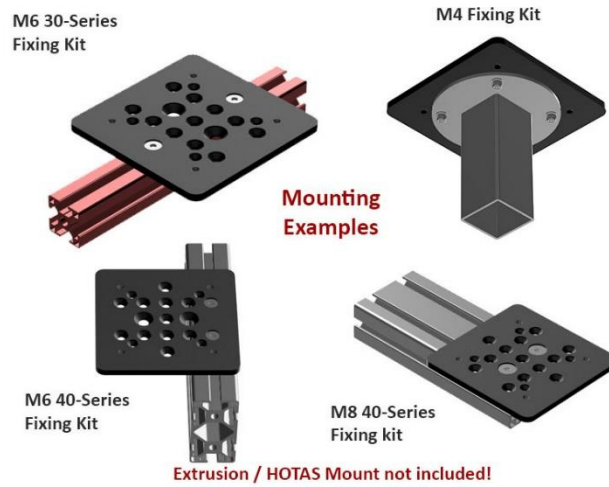

- Fit your Base Mount to the BSB:

